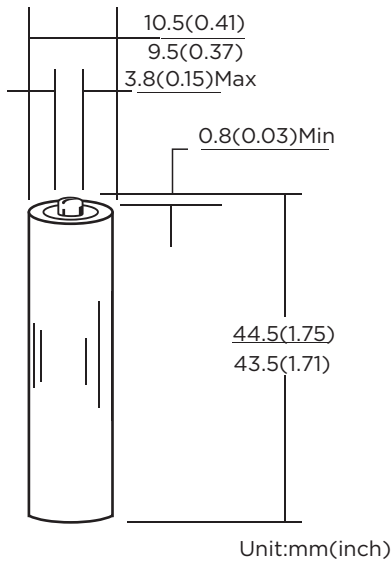


R03P(24D)

Super Heavy Duty Battery



Dimensions



Specifications

Chemical System:	Zinc-Manganese Dioxide (Zinc Chloride Electrolyte)
IEC Name:	R03
ANSI/NEDA:	24D(AAA)
Westinghouse Model:	R03P
Average Weight:	7.2g
Dimension(ΦxH)	10.0 ^{±0.5} x 44.0 ^{±0.5} mm 0.39 ^{±0.02} x 1.73 ^{±0.02} inch
Terminals:	Flat
Nominal Voltage:	1.5Volts
Capacity:	500mAh (Rated at 25mA to 0.8V)
Operating Temperature:	-18°C -55°C
Storage Temperature:	15°C -25°C
Relative Humidity:	60±15%
Jacket :	Aluminum Foil Label

Usage Guide



Flashlight



Clock



Radio

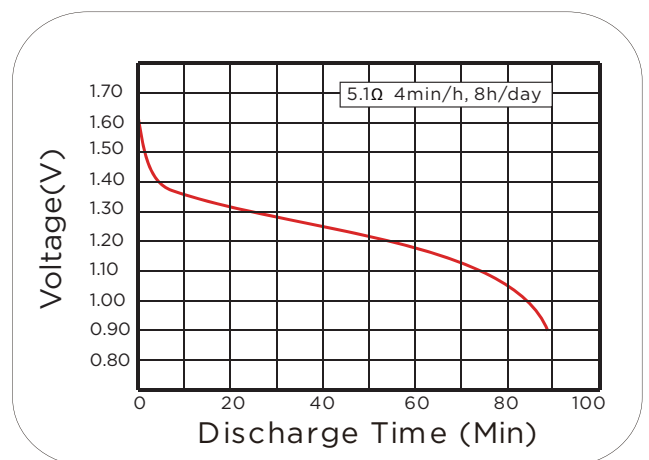
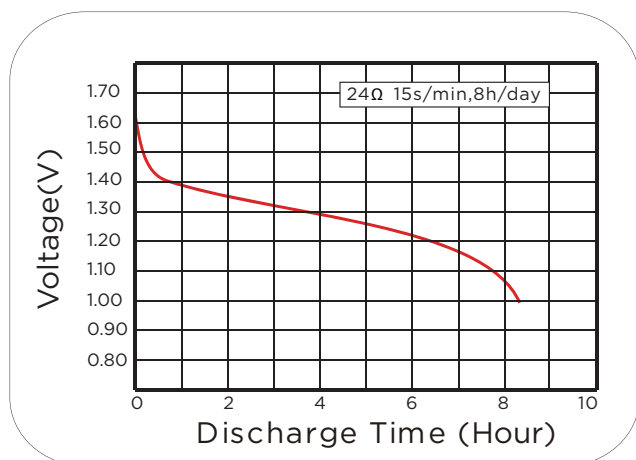
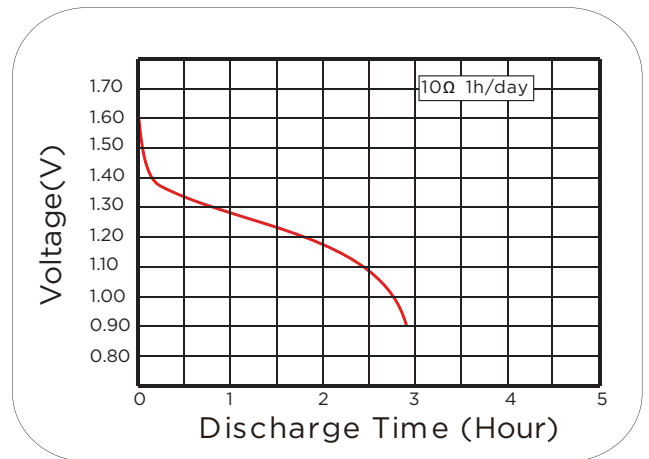
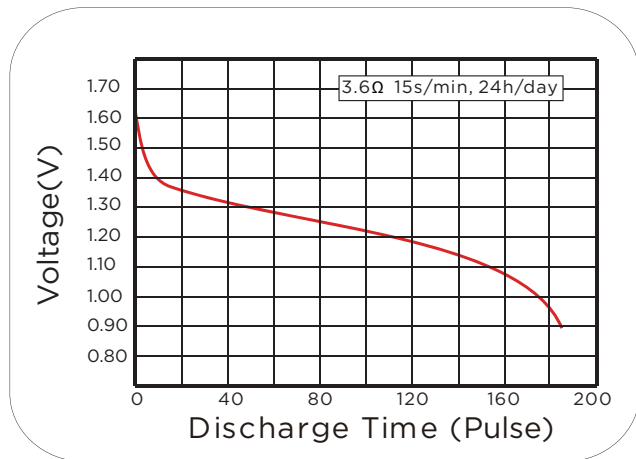
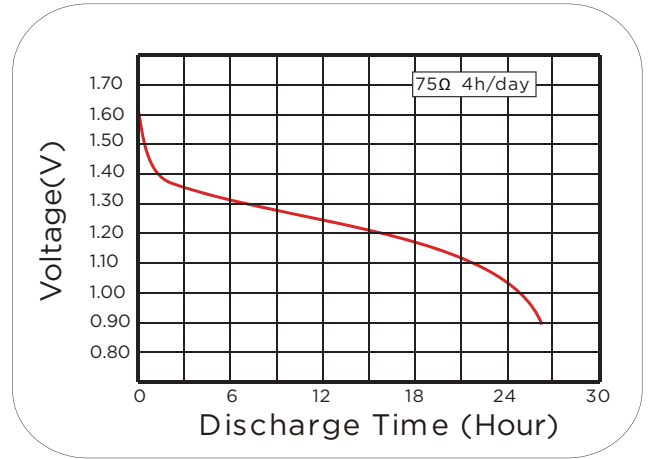
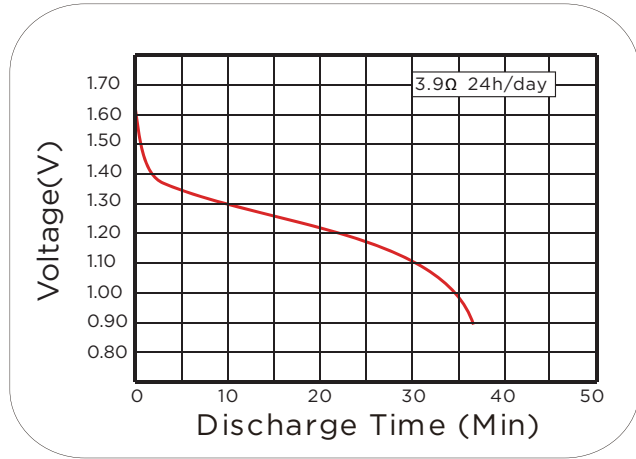
Cautions

Storage

Store the battery in a cool, dry and well-ventilated area.

Handling

- 1) Never charge the battery. Do not heat or disposed in fire or water. Do not modify or disassemble the battery. Do not short-circuit positive (+) and negative (-) terminals. Keep away from metal or other conductive materials.
- 2) Keep away from infants. If infant happens to swallow the battery, consult a doctor immediately.
- 3) When the battery is stored or disposed, isolate positive (+) and negative (-) terminals of the battery to avoid those terminals touch each other.
- 4) In case the battery electrolyte happen to come into mouth,gargle well enough and consult a doctor immediately.

R03P(24D)
Super Heavy Duty Battery
ANSI/IEC Standard Testing
Typical characteristics 21°C

Notice:

 Environmental elements comply with 2006/66/EC and US LAW 104-142 requirements. This data sheet is typical information specific to products manufactured at the time of its publication. For the latest information, contact us at: info@westinghousebattery.com.

 and WESTINGHOUSE are trademarks of Westinghouse Electric Corporation. Used under license by Camellion Battery, Ltd. All Rights Reserved.